


Heat Exchanger

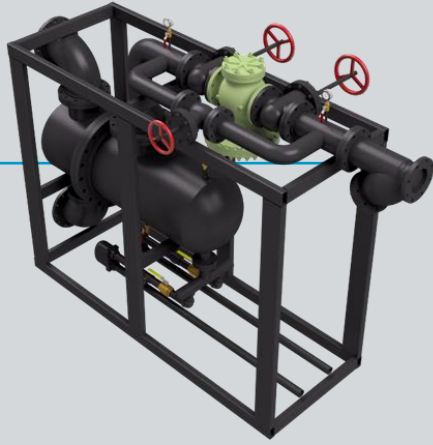

HX-2000

Features:

- Frame-mounted shell and tube heat exchanger
- Steam to hydronic hot water transfer
- Pre-installed steam valving ready for use

General Information

Rental Category	Heat Exchanger
Unit Design	Skid Mounted
Heat Exchanger Design	Shell and Tube
Use Type	Steam – Water

Specifications and Requirements

Usable Surface Area	326 ft ² (30.3 m ²)
Design Pressure – Shell	150 PSIG (10.3 BARG)
Feedwater Output Flow	150 PSIG (10.3 BARG)
Max Flow (Tube)	2,000 GPM (7,570 LPM)

Connections

Steam (Input)	6" 150# FLG
Condensate (Output)	2" NPT
Water Supply (Output)	10" 150# FLG
Water Supply (Input)	10" 150# FLG

Dimensions

Overall Length	11' 07" (3.5 M)
Overall Width	08' 10" (1.8 M)
Overall Height	04' 11" (1.5 M)
Shipping Weight	3,500 LBS (1,590 KGS)

Last updated on: 17-Dec-24

Atlas Copco

**Atlas Copco
Rental**
Making Agility Count

Atlas Copco Rental

www.atlascopcorental.com

Subject to change without prior notice. Information is for guidance only.
Please contact your nearest Rental office for detailed application advice.