


Heat Exchanger

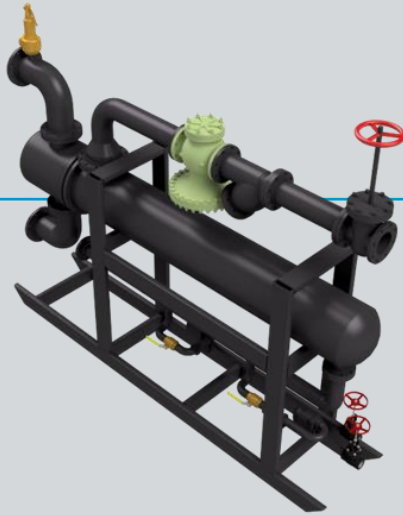

HX-800

Features:

- Frame-mounted shell and tube heat exchanger
- Steam to domestic hot water transfer
- Pre-installed steam valving ready for use

General Information

Rental Category	Heat Exchanger
Unit Design	Skid-mounted
Heat Exchanger Design	Shell and Tube
Use Type	Steam – Water, Water – Water

Specifications and Requirements

Usable Surface Area	263 ft ² (24.4 m ²)
Design Pressure – Shell	150 PSIG (10.3 BARG)
Feedwater Output Flow	150 PSIG (10.3 BARG)
Max Flow (Tube)	800 GPM (3,030 LPM)
Max Flow (Shell)	600 GPM (2,220 LPM)

Connections

Steam (Input)	4"/6" 150# FLG
Condensate (Output)	2" NPT
Water Supply (Output)	6"/8" 150# FLG
Water Supply (Input)	6"/8" 150# FLG

Dimensions

Overall Length	10' 10"/15' 03" (3.3/4.6 M)
Overall Width	07' 09' 04" (2.1/2.8 M)
Overall Height	02' 09"/02' 07" (0.8/0.8 M)
Shipping Weight	4,000/5,000 LBS (1,815/2,270 KGS)

Last updated on: 17-Dec-24

Atlas Copco

**Atlas Copco
Rental**
Making Agility Count

Atlas Copco Rental

www.atlascopcorental.com

Subject to change without prior notice. Information is for guidance only.
Please contact your nearest Rental office for detailed application advice.